

Single Ultra Low VF Schottky Rectifier


FEATURES AND BENEFITS

- Low power loss, high efficiency operation
- Low forward voltage drop
- Fast switching capability
- High forward surge capability
- Excellent High Temperature Stability

MECHANICAL DATA

- Epoxy : UL94 V-0 rated flame retardant
- Case: TO-220-3L/ ITO-220AB Package
- Terminals: Matte Tin annealed over copper
- Weight: Approximated 2.03 grams

Primary Characteristic	
I_O	60A
V_{RRM}	45V
I_{FSM}	880A
V_F Typical=5A, $T_J=125^\circ\text{C}$	0.22V
T_{Jmax}	150°C

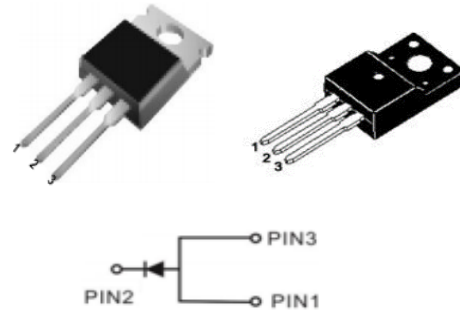

Maximum Ratings ($T_a=25^\circ\text{C}$ unless otherwise specified)			
Characteristics	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	45	V
Working Peak Reverse Voltage	V_{RWM}	45	V
DC Blocking Voltage	V_{DC}	45	V
RMS Reverse Voltage	V_{RMS}	32	V
Average Forward Rectified Current (per diode)	I_O	60	Amps
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	880	Amps

Electrical Characteristics ($T_a=25^\circ\text{C}$ unless otherwise specified)						
Characteristics			Symbol	Typ.	Max.	Unit
Forward Voltage Drop ⁽¹⁾	$I_F=5\text{A}$	$T_a=25^\circ\text{C}$	V_F	0.35	0.39	V
	$I_F=60\text{A}$	$T_a=25^\circ\text{C}$	V_F	0.45	0.49	V
	$I_F=5\text{A}$	$T_a=125^\circ\text{C}$	V_F	0.22	0.26	V
	$I_F=60\text{A}$	$T_a=125^\circ\text{C}$	V_F	0.44	0.48	V
Reverse Current ⁽²⁾	$V_R=45\text{V}$	$T_a=25^\circ\text{C}$	I_R	45	135	μA
	$V_R=45\text{V}$	$T_a=125^\circ\text{C}$	I_R	25	75	mA

THERMAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)				
Characteristics		Symbol	Value	Unit
Typical Thermal Resistance, junction to case	TO-220AB	$R_{\theta JC}$	2.8	$^\circ\text{C/W}$
Typical Thermal Resistance, junction to case	ITO-220AB	$R_{\theta JC}$	4.0	$^\circ\text{C/W}$
Operating Temperature Range (in DC Mode)		T_J	-65 to +150	$^\circ\text{C}$
Storage Temperature Range		T_{STG}	-65 to +150	$^\circ\text{C}$

Notes (1): Pulse test: 300 μs pulse width, 1% duty cycle.

Notes (2): Pulse width $\leq 40\text{ms}$

Notes (3): FR-4 PCB, 2oz copper. Minimum recommended pad layout

Package Outline Dimensions (in millimeters)

ITO-220				
SYMBOL	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
A	4.60	4.80	0.18	0.19
b	0.70	0.91	0.03	0.04
b1	1.20	1.47	0.05	0.06
b2	1.10	1.30	0.04	0.05
C	0.45	0.63	0.02	0.02
D	15.80	15.97	0.62	0.63
e	2.54			
E	10.00	10.10	0.39	0.40
F	2.44	2.54	0.10	0.10
G	6.50	6.70	0.26	0.26
L	12.90	13.10	0.51	0.52
L1	3.13	3.23	0.12	0.13
Q	2.65	2.75	0.10	0.11
Q1	3.20	3.30	0.13	0.13
Ψr	3.08	3.18	0.12	0.13

Top View: Dimensions include E (width), E/2 (half-width), and 2Xb2 (lead spacing). Lead width is 2Xb1. Mounting holes are 2Xe apart.

Side View: Dimensions include A (height), F (flange thickness), A3 (lead height), C (lead length), and D (total length). Labels indicate 'Metal Flash Bleeding' and 'Exposed Cu' on the lead.

Bottom View: Shows the lead arrangement with dimensions 2Xb2 and 2Xb1.


TO-220				
SYMBOL	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
A	3.65	4.82	0.14	0.19
A1	0.51	1.39	0.02	0.05
A2	2.04	2.92	0.08	0.11
b	0.39	1.01	0.02	0.04
b1	1.15	1.82	0.05	0.07
b2	1.15	1.77	0.05	0.07
c	0.36	0.50	0.01	0.02
D	14.22	16.51	0.56	0.65
D1	8.39	9.01	0.33	0.35
D2	11.45	12.87	0.45	0.51
E	9.66	10.66	0.38	0.42
E1	6.86	8.89	0.27	0.35
e	2.54BSC		2.54BSC	
e1	5.08BSC		5.08BSC	
H1	5.85	6.85	0.23	0.27
L	12.70	14.73	0.50	0.58
L1	-	6.35	-	0.25
L2	15.80	16.20	0.62	0.64
ΨP	3.54	4.08	0.14	0.16
Q	2.54	3.42	0.10	0.13

Top View: Dimensions include E (width), E/2 (half-width), and 2Xb2 (lead spacing). Lead width is 2Xb1. Mounting holes are 2Xe apart. A note points to 'Exposed Cu' on the lead.

Side View: Dimensions include A (height), A1 (flange thickness), A2 (lead height), C (lead length), and D (total length). Labels indicate 'Exposed Cu' on the lead.

Bottom View: Shows the lead arrangement with dimensions 2Xb2 and 2Xb1.

Marking Information

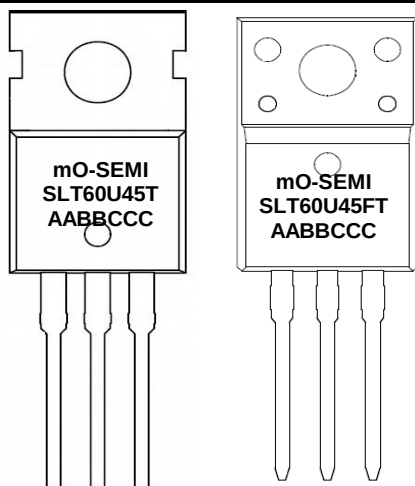

mO-SEMI
SLT60U45
AABBCCC
*FT=ITO-220
*T=TO-220

=Series Name
=Part Number Marking Code
=Product Tracking Code
=Single ITO-220
=Single TO-220