

Single Ultra Low VF Schottky Rectifier


FEATURES AND BENEFITS

- Low power loss, high efficiency operation
- Low forward voltage drop
- Fast switching capability
- High forward surge capability
- Excellent High Temperature Stability

MECHANICAL DATA

- Epoxy : UL94 V-0 rated flame retardant
- Case: TO-220AB / ITO-220AB Package
- Terminals: Matte Tin annealed over copper
- Weight: Approximated 2.03 grams

Primary Characteristic	
I_O	16A
V_{RRM}	150V
I_{FSM}	180A
V_F Typical=3A, $T_J=125^\circ\text{C}$	0.47V
T_{Jmax}	175°C

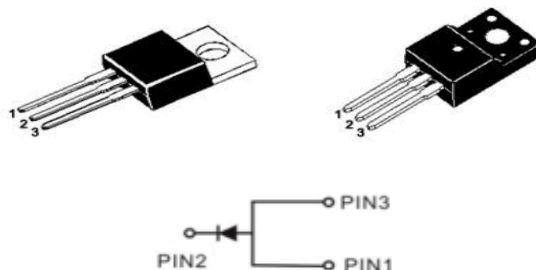

Maximum Ratings ($T_a=25^\circ\text{C}$ unless otherwise specified)			
Characteristics	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	150	V
Working Peak Reverse Voltage	V_{RWM}	150	V
DC Blocking Voltage	V_{DC}	150	V
RMS Reverse Voltage	V_{RMS}	105	V
Average Forward Rectified Current (per diode)	I_O	16	Amps
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	180	Amps

Electrical Characteristics ($T_a=25^\circ\text{C}$ unless otherwise specified)						
Characteristics			Symbol	Typ.	Max.	Unit
Forward Voltage Drop ⁽¹⁾	IF=3A	$T_a=25^\circ\text{C}$	V_F	0.60	0.64	V
	IF=16A	$T_a=25^\circ\text{C}$	V_F	1.20	1.24	V
	IF=3A	$T_a=125^\circ\text{C}$	V_F	0.47	0.51	V
	IF=16A	$T_a=125^\circ\text{C}$	V_F	0.69	0.73	V
Reverse Current ⁽²⁾	VR=150V	$T_a=25^\circ\text{C}$	I_R	8	25	μA
	VR=150V	$T_a=125^\circ\text{C}$	I_R	3	9	mA

THERMAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)				
Characteristics		Symbol	Value	Unit
Typical Thermal Resistance, junction to case	TO-220AB	$R_{\theta JC}$	2.8	$^\circ\text{C/W}$
Typical Thermal Resistance, junction to case	ITO-220AB	$R_{\theta JC}$	4.0	$^\circ\text{C/W}$
Operating Temperature Range (in DC Mode)		T_J	-65 to +175	$^\circ\text{C}$
Storage Temperature Range		T_{STG}	-65 to +150	$^\circ\text{C}$

Notes (1): Pulse test: 300 μs pulse width, 1% duty cycle.

Notes (2): Pulse width $\leq 40\text{ms}$

Notes (3): FR-4 PCB, 2oz copper. Minimum recommended pad layout

RATINGS AND CHARACTERISTICS CURVES

Fig 1. Typical Forward Characteristics

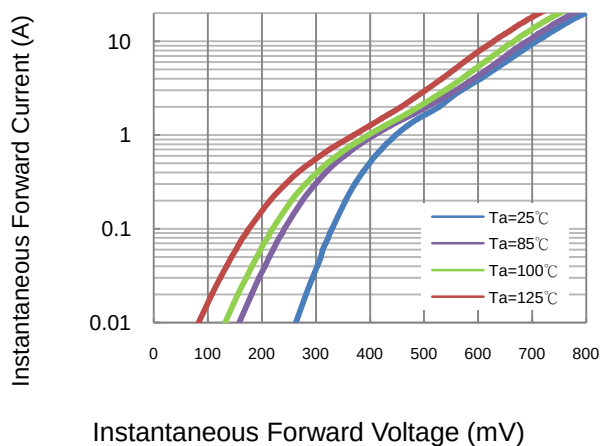


Fig 2. Typical Reverse Characteristics

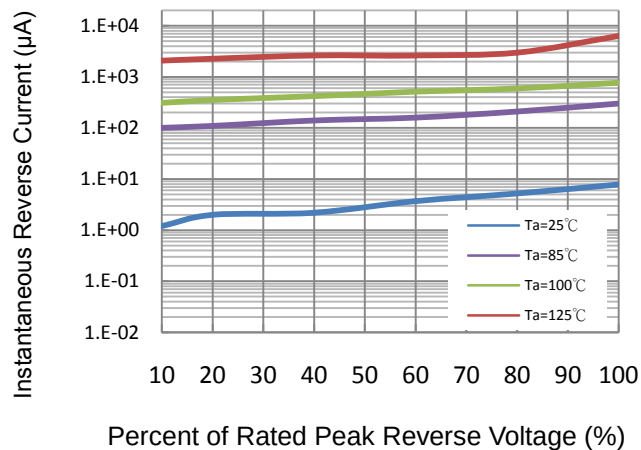


Fig 3. Typical Forward Current Derating Curve



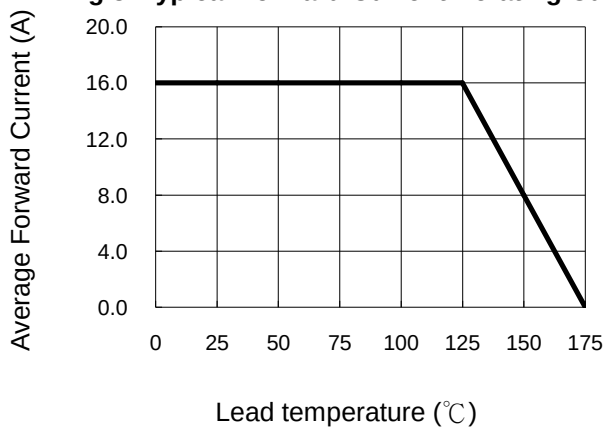


Fig 4. Non-repetitive Forward Surge Current


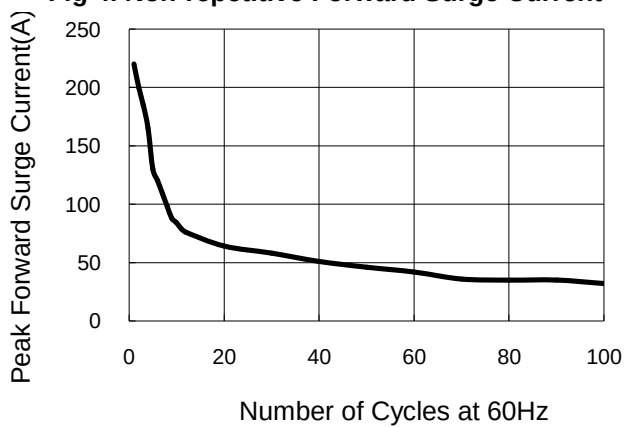


Package Outline Dimensions (in millimeters)

ITO-220				
SYMBOL	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
A	4.60	4.80	0.18	0.19
b	0.70	0.91	0.03	0.04
b1	1.20	1.47	0.05	0.06
b2	1.10	1.30	0.04	0.05
C	0.45	0.63	0.02	0.02
D	15.80	15.97	0.62	0.63
e	2.54			
E	10.00	10.10	0.39	0.40
F	2.44	2.54	0.10	0.10
G	6.50	6.70	0.26	0.26
L	12.90	13.10	0.51	0.52
L1	3.13	3.23	0.12	0.13
Q	2.65	2.75	0.10	0.11
Q1	3.20	3.30	0.13	0.13
Ψr	3.08	3.18	0.12	0.13

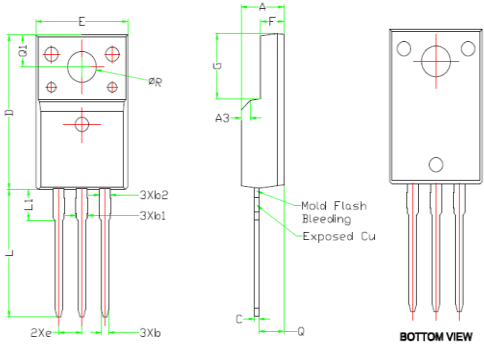

Marking Information

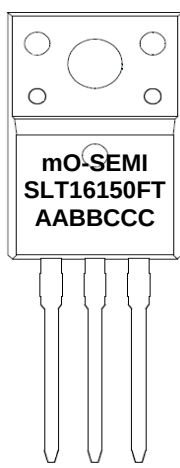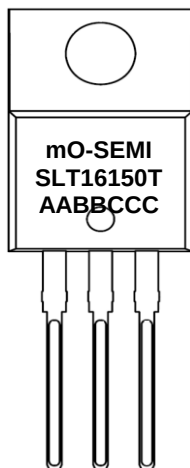

mO-SEMI
SLT16150
XXXXXXX
*T=TO-220
*FT=ITO-220

=Series Name
=Part Number Marking Code
=Product Tracking Code
=Single TO-220
=Single ITO-220