


### Dual Common-Cathode Ultra Low VF Schottky Rectifier

#### FEATURES AND BENEFITS

- Low power loss, high efficiency operation
- Low forward voltage drop
- Fast switching capability
- High forward surge capability
- Excellent High Temperature Stability

#### MECHANICAL DATA

- Epoxy : UL94 V-0 rated flame retardant
- Case: TO-220AB / ITO-220AB Package
- Terminals: Matte Tin annealed over copper
- Weight: Approximated 2.03 grams

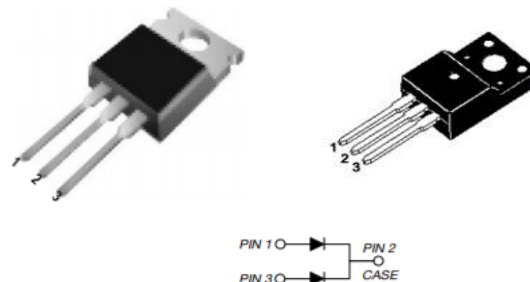

| Primary Characteristic                    |       |
|-------------------------------------------|-------|
| $I_O$                                     | 2X20A |
| $V_{RRM}$                                 | 100V  |
| $I_{FSM}$                                 | 350A  |
| $V_F$ Typica=10A, $T_J=125^\circ\text{C}$ | 0.50V |
| $T_{Jmax}$                                | 175°C |

| Maximum Ratings (Ta=25°C unless otherwise specified)                                               |         |          |                  |       |      |      |
|----------------------------------------------------------------------------------------------------|---------|----------|------------------|-------|------|------|
| Characteristics                                                                                    |         |          | Symbol           | Value |      | Unit |
| Peak Repetitive Reverse Voltage                                                                    |         |          | V <sub>RRM</sub> | 100   |      | V    |
| Working Peak Reverse Voltage                                                                       |         |          | V <sub>RWM</sub> | 100   |      | V    |
| DC Blocking Voltage                                                                                |         |          | V <sub>DC</sub>  | 100   |      | V    |
| RMS Reverse Voltage                                                                                |         |          | V <sub>RMS</sub> | 70    |      | V    |
| Average Forward Rectified Current (per diode)                                                      |         |          | I <sub>O</sub>   | 20    |      | Amps |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) |         |          | I <sub>FSM</sub> | 350   |      | Amps |
| Electrical Characteristics (Ta=25°C unless otherwise specified)                                    |         |          |                  |       |      |      |
| Characteristics                                                                                    |         |          | Symbol           | Typ.  | Max. | Unit |
| Forward Voltage Drop <sup>1)</sup>                                                                 | IF=10A  | Ta=25°C  | V <sub>F</sub>   | 0.55  | 0.59 | V    |
|                                                                                                    | IF=20A  | Ta=25°C  | V <sub>F</sub>   | 0.68  | 0.72 | V    |
|                                                                                                    | IF=10A  | Ta=125°C | V <sub>F</sub>   | 0.50  | 0.54 | V    |
|                                                                                                    | IF=20A  | Ta=125°C | V <sub>F</sub>   | 0.60  | 0.64 | V    |
| Reverse Current <sup>2)</sup>                                                                      | VR=100V | Ta=25°C  | I <sub>R</sub>   | 10    | 30   | μA   |
|                                                                                                    | VR=100V | Ta=125°C | I <sub>R</sub>   | 6     | 18   | mA   |

| THERMAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) |           |                 |             |                    |
|----------------------------------------------------------------------------|-----------|-----------------|-------------|--------------------|
| Characteristics                                                            |           | Symbol          | Value       | Unit               |
| Typical Thermal Resistance, junction to case                               | TO-220AB  | $R_{\theta JC}$ | 2.8         | $^\circ\text{C/W}$ |
| Typical Thermal Resistance, junction to case                               | ITO-220AB | $R_{\theta JC}$ | 4.0         | $^\circ\text{C/W}$ |
| Operating Temperature Range ( in DC Mode)                                  |           | $T_J$           | -65 to +175 | $^\circ\text{C}$   |
| Storage Temperature Range                                                  |           | $T_{STG}$       | -65 to +150 | $^\circ\text{C}$   |

Notes (1): Pulse test: 300 $\mu\text{s}$  pulse width, 1% duty cycle.

Notes (2): Pulse width  $\leq 40\text{ms}$

Notes (3): FR-4 PCB, 2oz copper. Minimum recommended pad layout

### RATINGS AND CHARACTERISTICS CURVES

Fig 1. Typical Forward Characteristics

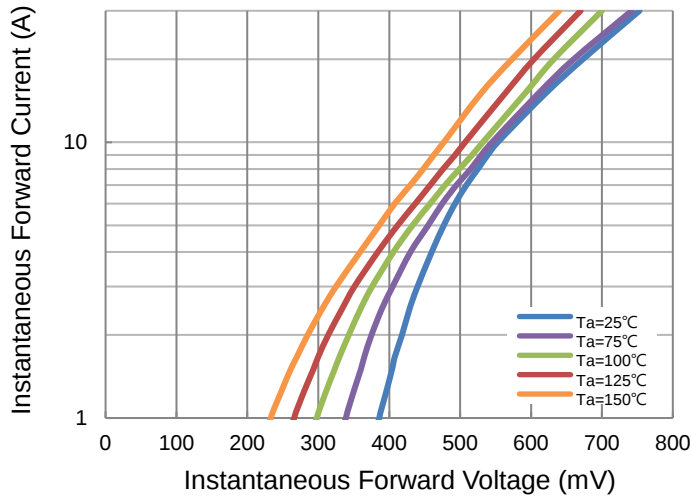


Fig 2. Typical Reverse Characteristics

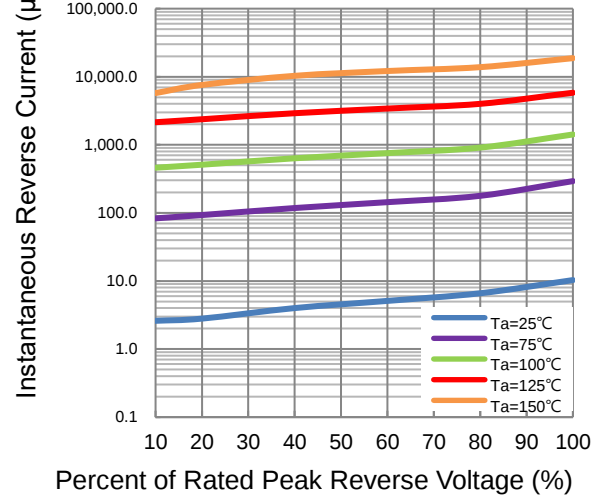


Fig 3. Typical Forward Current Derating Curve



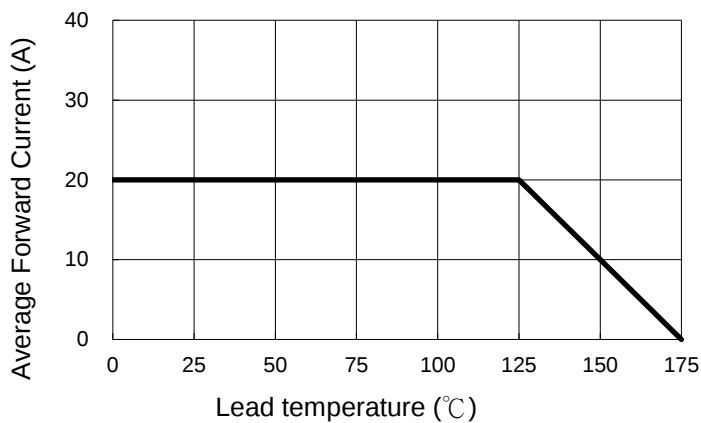


Fig 4. Non-repetitive Forward Surge Current

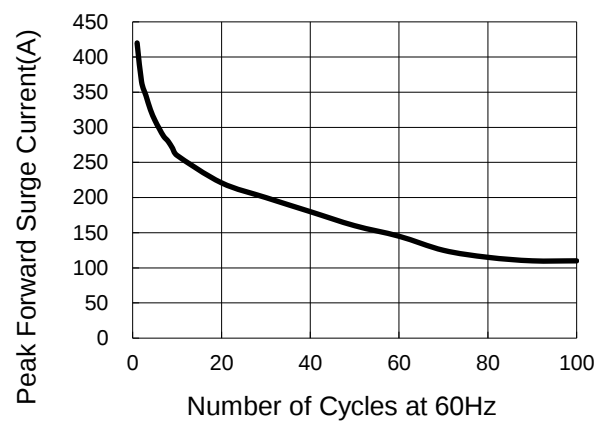


### Package Outline Dimensions (in millimeters)


| ITO-220 |             |       |        |      |
|---------|-------------|-------|--------|------|
| SYMBOL  | Dimensions  |       |        |      |
|         | Millimeters |       | Inches |      |
|         | Min         | Max   | Min    | Max  |
| A       | 4.60        | 4.80  | 0.18   | 0.19 |
| b       | 0.70        | 0.91  | 0.03   | 0.04 |
| b1      | 1.20        | 1.47  | 0.05   | 0.06 |
| b2      | 1.10        | 1.30  | 0.04   | 0.05 |
| C       | 0.45        | 0.63  | 0.02   | 0.02 |
| D       | 15.80       | 15.97 | 0.62   | 0.63 |
| e       | 2.40        | 2.70  | 0.09   | 0.11 |
| E       | 10.00       | 10.30 | 0.39   | 0.41 |
| F       | 2.44        | 2.64  | 0.10   | 0.10 |
| G       | 6.50        | 6.90  | 0.26   | 0.27 |
| L       | 12.90       | 13.30 | 0.51   | 0.52 |
| L1      | 3.13        | 3.33  | 0.12   | 0.13 |
| Q       | 2.65        | 2.85  | 0.10   | 0.11 |
| Q1      | 3.20        | 3.40  | 0.13   | 0.13 |
| ΦR      | 3.08        | 3.28  | 0.12   | 0.13 |

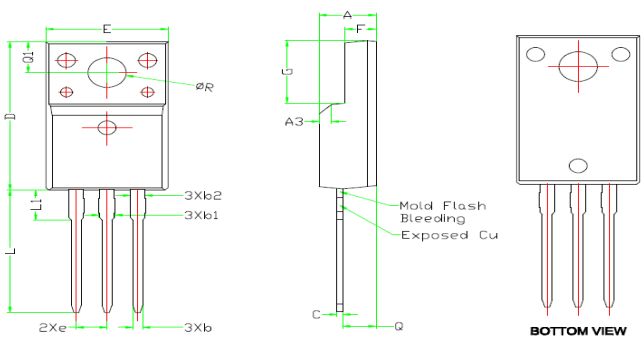

| TO-220 |             |       |        |      |
|--------|-------------|-------|--------|------|
| SYMBOL | Dimensions  |       |        |      |
|        | Millimeters |       | Inches |      |
|        | Min         | Max   | Min    | Max  |
| A      | 4.24        | 4.64  | 0.17   | 0.18 |
| A1     | 1.15        | 1.40  | 0.05   | 0.06 |
| A2     | 2.30        | 2.70  | 0.09   | 0.11 |
| b      | 0.70        | 0.90  | 0.03   | 0.04 |
| b1     | 1.20        | 1.75  | 0.05   | 0.07 |
| b2     | 1.20        | 1.70  | 0.05   | 0.07 |
| c      | 0.40        | 0.60  | 0.02   | 0.02 |
| D      | 14.70       | 16.00 | 0.58   | 0.63 |
| D1     | 8.82        | 9.02  | 0.35   | 0.36 |
| D2     | 12.43       | 12.83 | 0.49   | 0.51 |
| E      | 9.96        | 10.36 | 0.39   | 0.41 |
| E1     | 6.86        | 8.89  | 0.27   | 0.35 |
| E2     | -           | 0.76  | -      | 0.03 |
| E3*    | 8.7REF.     |       |        |      |
| e      | 2.54BSC     |       |        |      |
| e1     | 5.08BSC     |       |        |      |
| H1     | 6.30        | 6.60  | 0.25   | 0.26 |
| L      | 13.47       | 13.97 | 0.53   | 0.55 |
| L1     | 3.60        | 4.00  | 0.14   | 0.16 |
| ΦP     | 3.75        | 3.93  | 0.15   | 0.15 |
| Q      | 2.60        | 3.00  | 0.10   | 0.12 |
| Q1*    | 1.73REF.    |       |        |      |
| R*     | 1.82REF.    |       |        |      |

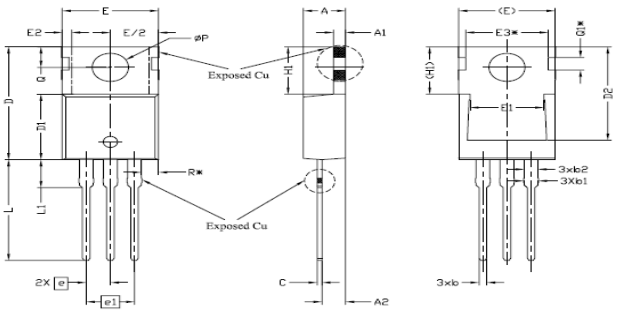

### Marking Information

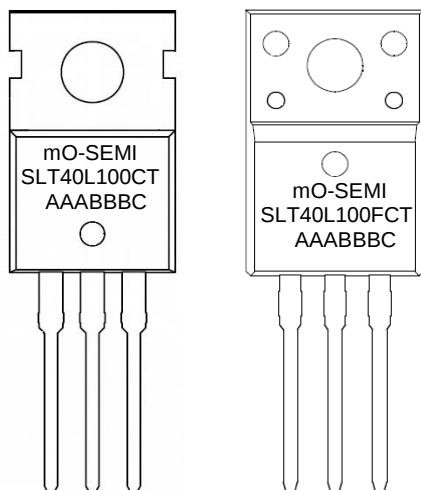

mO-SEMI  
 SLT40L100  
 AAABBBC  
 \*FCT=ITO-220  
 \*CT=TO-220

=Series Name  
 =Part Number Marking Code  
 =Product Tracking Code  
 =Dual ITO-220  
 =Dual TO-220