

Single Ultra Low VF Schottky Rectifier

FEATURES AND BENEFITS

- Low power loss, high efficiency operation
- Low forward voltage drop
- Fast switching capability
- High forward surge capability
- Excellent High Temperature Stability

MECHANICAL DATA

- Epoxy : UL94 V-0 rated flame retardant
- Case: TOLL Package
- Terminals: Matte Tin annealed over copper

Primary Characteristic	
I_O	60A
V_{RRM}	200V
I_{FSM}	880A
V_F Typical= 5A, $T_J=125^{\circ}C$	0.50V
T_{Jmax}	175°C



Maximum Ratings (Ta=25°C unless otherwise specified)						
Characteristics			Symbol	Value		Unit
Peak Repetitive Reverse Voltage			V _{RRM}	200		V
Working Peak Reverse Voltage			V _{RWM}	200		V
DC Blocking Voltage			V _{DC}	200		V
RMS Reverse Voltage			V _{RMS}	140		V
Average Forward Rectified Current (per diode)			I _O	60		Amps
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)			I _{FSM}	880		Amps
Electrical Characteristics (Ta=25°C unless otherwise specified)						
Characteristics			Symbol	Typ.	Max.	Unit
Forward Voltage Drop ¹⁾	IF=5A	Ta=25°C	V _F	0.62	0.66	V
	IF=10A	Ta=25°C	V _F	0.67	0.71	V
	IF=60A	Ta=25°C	V _F	0.97	1.01	V
	IF=5A	Ta=125°C	V _F	0.50	0.54	V
	IF=10A	Ta=125°C	V _F	0.60	0.64	V
	IF=60A	Ta=125°C	V _F	0.80	0.84	V
Reverse Current ²⁾	VR=200V	Ta=25°C	I _R	15	45	μA
	VR=200V	Ta=125°C	I _R	1	3	mA
THERMAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)						
Characteristics			Symbol	Value		Unit
Typical Thermal Resistance, junction to case		TOLL	R _{θJC}	0.45		°C/W
Operating Temperature Range (in DC Mode)			T _J	-65 to +175		°C
Storage Temperature Range			T _{STG}	-65 to +150		°C

Notes (1): Pulse test: 300 μ s pulse width, 1% duty cycle.

Notes (2): Pulse width $\leq 40\text{ms}$

Notes (3): FR-4 PCB, 2oz copper. Minimum recommended pad layout

RATINGS AND CHARACTERISTICS CURVES

Fig 1. Typical Forward Characteristics

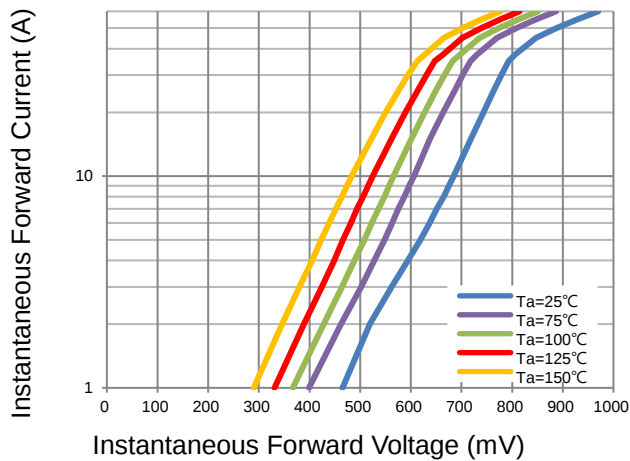


Fig 2. Typical Reverse Characteristics

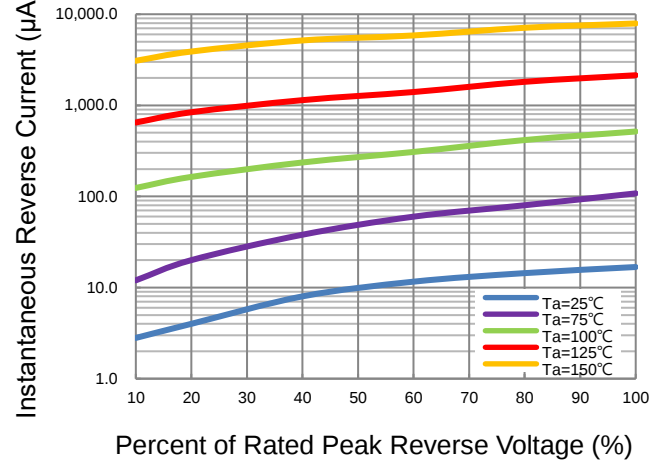


Fig 3. Typical Forward Current Derating Curve



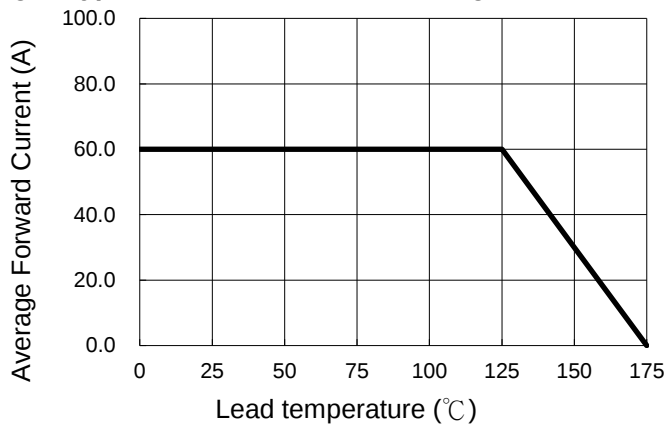



Fig 4. Non-repetitive Forward Surge Current

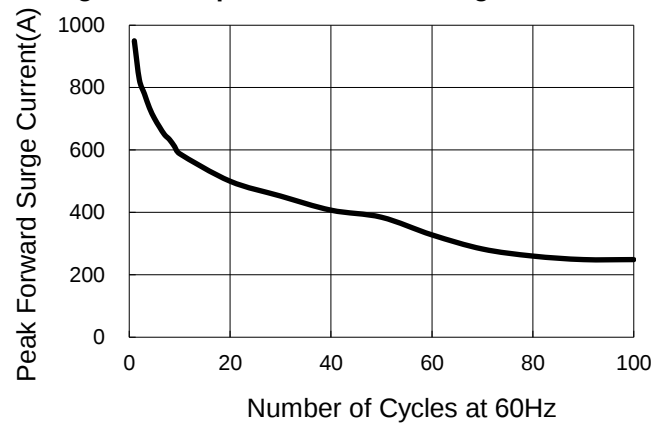

Package Outline Dimensions (in millimeters)

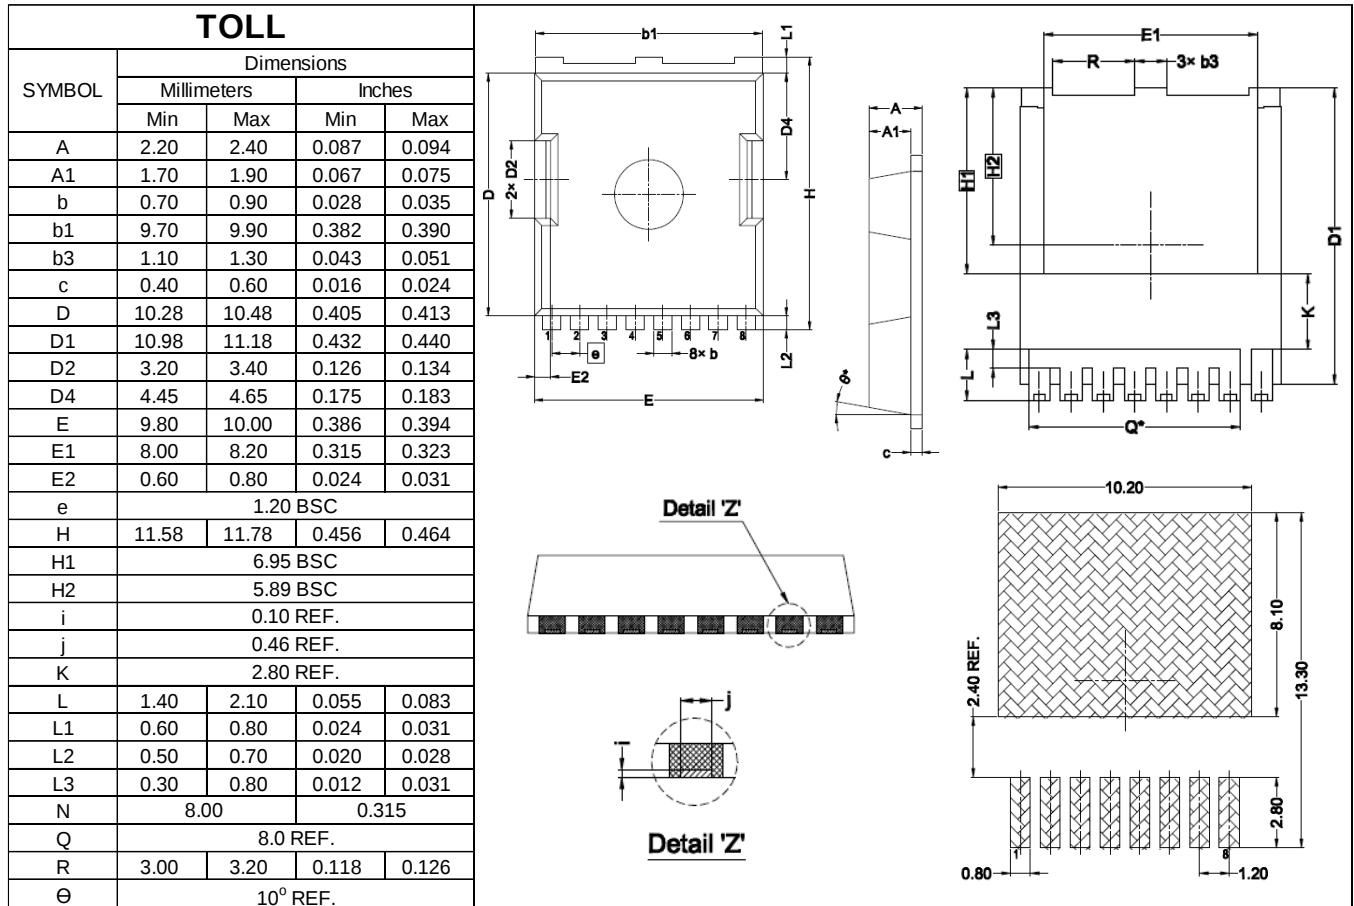

Marking Information

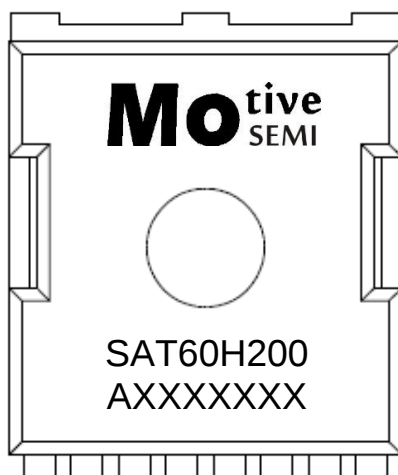

mO-SEMI
SAT60H200
AXXXXXXX
*A=TOLL

=Series Name
=Part Number Marking Code
=Product Tracking Code
=Single TOLL